

**Pb Free Plating Product**

## F12C20A thru F12C60A



### 12.0 Ampere Common Anode Fast Recovery Rectifier Diodes

<p><b>Feature</b></p> <ul style="list-style-type: none"> <li>★ Fast switching for high efficiency</li> <li>★ Low forward voltage drop</li> <li>★ High current capability</li> <li>★ Low reverse leakage current</li> <li>★ High surge current capability</li> </ul> <p><b>Application</b></p> <ul style="list-style-type: none"> <li>★ Automotive Environment(Inverters/Converters)</li> <li>★ Plating Power Supply,Adaptor,SMPS and UPS</li> <li>★ Car Audio Amplifiers and Sound Device System</li> </ul>	<p><b>Mechanical Data</b></p> <ul style="list-style-type: none"> <li>★ Case:TO-220AB Heatsink</li> <li>★ Epoxy: UL 94V-0 rate flame retardant</li> <li>★ Terminals: Solderable per MIL-STD-202 method 208</li> <li>★ Polarity: As marked on diode body</li> <li>★ Mounting position: Any</li> <li>★ Weight: 2.2 gram approximately</li> </ul>	<p><b>TO-220AB</b> Unit : inch (mm)</p> <p>① → ② → ③ Case Positive Common Cathode Suffix "C"</p> <p>① ← ② ← ③ Case Negative Common Anode Suffix "A"</p> <p>① → ② → ③ Case Doubler Tandem Polarity Suffix "D"</p>
---	---	--

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

	SYMBOL	F12C20C F12C20A F12C20D	F12C40C F12C40A F12C40D	F12C60C F12C60A F12C60D	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	200	400	600	V
Maximum RMS Voltage	V <sub>RMS</sub>	140	280	420	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	200	400	600	V
Maximum Average Forward Rectified Current T <sub>c</sub> =100°C	I <sub>F(AV)</sub>	12.0			A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	100			A
Maximum Instantaneous Forward Voltage @ 6.0 A	V <sub>F</sub>	0.98	1.3	1.7	V
Maximum DC Reverse Current @T <sub>J</sub> =25°C At Rated DC Blocking Voltage @T <sub>J</sub> =125°C	I <sub>R</sub>	10.0 250			uA uA
Maximum Reverse Recovery Time (Note 1)	T <sub>rr</sub>	35			nS
Typical junction Capacitance (Note 2)	C <sub>J</sub>	65			pF
Typical Thermal Resistance (Note 3)	R <sub>θJC</sub>	2.2			°CW
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150			°C

NOTES : (1) Reverse recovery test conditions I<sub>F</sub> = 0.5A, I<sub>R</sub> = 1.0A, I<sub>rr</sub> = 0.25A.  
 (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.  
 (3) Thermal Resistance junction to case.

FIG.1 - FORWARD CURRENT DERATING CURVE

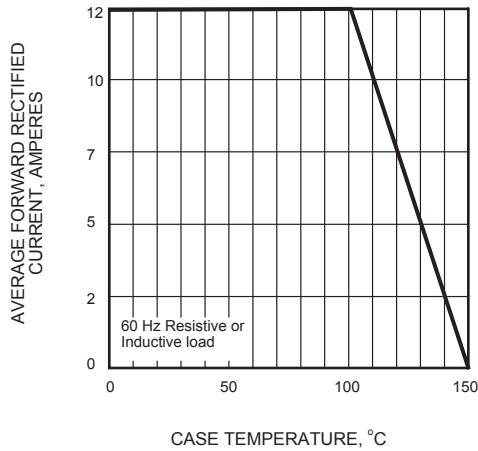


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

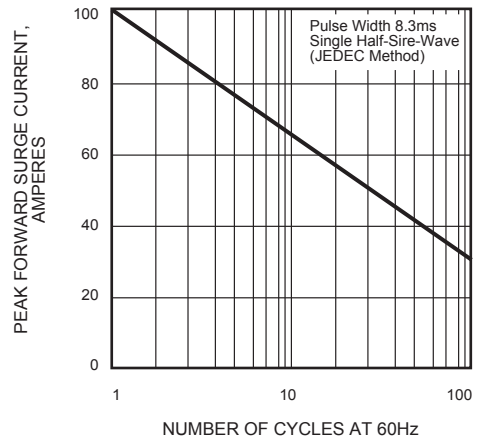


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

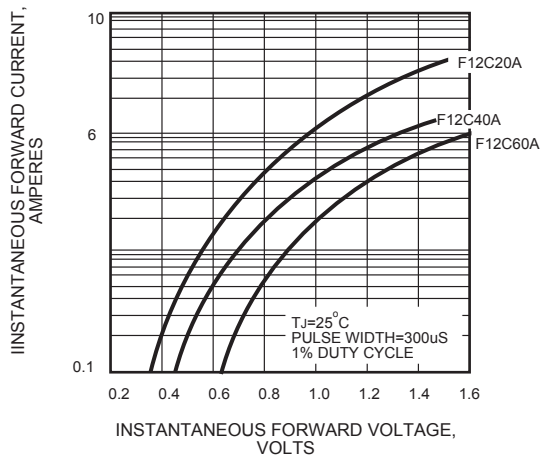


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

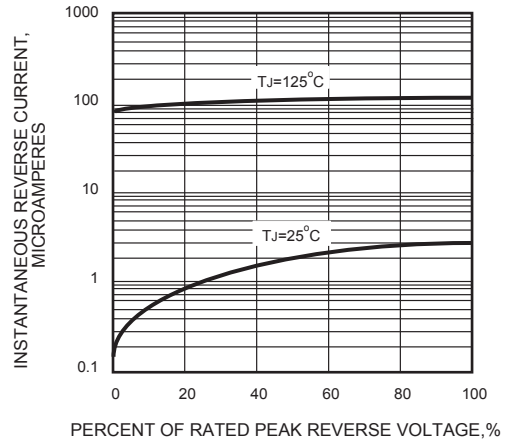


FIG.5 - TYPICAL JUNCTION CAPACITANCE

